

Unfortunately the DE46 is discontinued.
However, you can simply configure the DE91 with the same properties.

28.01.2024


DE46



DE91



Measurement range

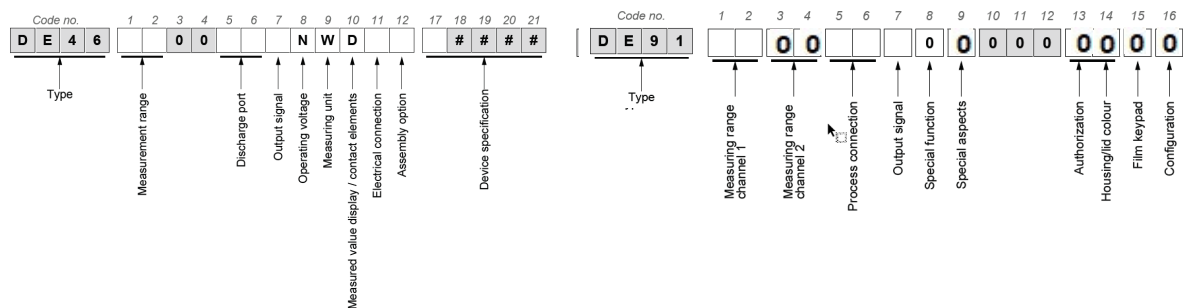

Measurement range

D1	0 ... 25 Pa
J6	0 ... 50 Pa
D4	0 ... 100 Pa
D6	0 ... 250 Pa
J7	0 ... 500 Pa
D9	0 ... 1000 Pa
L5	-25 ... +25 Pa
L2	-50 ... +50 Pa
L0	-20 ... +80 Pa
L7	-100 ... +100 Pa

D1	0 ... 25 Pa
J6	0 ... 50 Pa
D4	0 ... 100 Pa
D5	0 ... 160 Pa
D6	0 ... 250 Pa
D7	0 ... 400 Pa
J7	0 ... 500 Pa
D8	0 ... 600 Pa
D9	0 ... 1000 Pa
L4	-12.5 ... +12.5 Pa
L5	-25 ... +25 Pa
L2	-50 ... +50 Pa
L0	-20 ... +80 Pa
L7	-100 ... +100 Pa
L6	-250 ... +250 Pa
L8	-1 ... +1 kPa

The measuring range can easily be set to the measuring range of the DE46

Process connection

[5,6]	(Code no.)
40	Aluminium screw connection for 6 / 4 mm hose
41	Aluminium screw connection for 8 / 6 mm hose
P6	Pneumatic plug connector for 6/4 mm hose
P8	Pneumatic plug connector for 8/6 mm hose

→
→
→
→

[5,6]	
40	CK aluminum screw connection for 6/4 mm hose
41	CK aluminum screw connection for 8/6 mm hose
P6	Pneumatic plug connector MS nickel-plated for 6/4 mm hose
P8	Pneumatic plug connector MS nickel-plated for 8/6 mm hose
24	Cutting ring connection in stainless steel for 6 mm pipe
25	Cutting ring connection in stainless steel for 8 mm pipe

Output signal

[7]	(Code no.)
0	without output signal
A	0... 20 mA (3-wire)
P	4... 20 mA (3-wire)
C	0 ... 10 V (3-wire)

→
→
→
→

0
A
P
C

[7]	Output signal
0	ohne
Switchable, factory preset:	
C	0 ... 10 V
A	0 ... 20 mA
P	4 ... 20 mA
Digital interface:	
M	RS485 Modbus RTU (without switching outputs)
N	RS485 Modbus RTU (with 4 switching outputs)
I	IO-Link (with 4 switching outputs)