



**Digital precision level** 

**XT290** 



## FOR RELIABLE MACHINE INSTALLATION

Digital levels are extremely useful tools for setting-up and aligning most types of machines, for example, levelling machine bases, rolls, tables, etc.


0.1 mm/m [mils/inch] is a normal requirement for level at machine installations to ensure correct functionality. Other applications include checking straightness, flatness and parallelism. Easy-Laser® XT290 is simply the must-have addition to your laser-based alignment system.

Accuracy is guaranteed by the precision-ground, hardened steel base. Wide measurement range, very fast precision level stabilisation, and an easy-to-read TFT colour display with graphics makes the measurement procedure quick and easy. Two mounting holes allow for your own adaptations and brackets.

## **CONNECT TO A SEPARATE DISPLAY UNIT**

The XT290 connects to the free XT Alignment app (iOS/Android) and our XT display unit. Using a separate display unit, for example your smartphone, makes it all even easier as you can read off and follow the adjustment at the point on the machine where the adjustment is made. It is also safer for some applications, where you can leave the unit inside the safety fence, then follow the measurement outside it.


You can make a measurement report with pictures and share it (PDF and Excel). Using the app you can also record values during a set time and frequency, i.e. dynamic measurements. Another possibility with the app is to connect up to four units at the same time (digital levels/measuring units), displayed in the same screen view.





Clear display on XT290. Live values and graphics.

Align with live values, document as PDF. (XT Alignment app for iOS and Android. Values/Level program.)

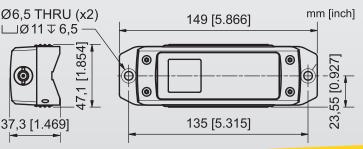



Easy-Laser® XT290 Digit	al Precision Level (Comp	lete kit), Part No. 12-1244

Digital Precision Leve	ı
------------------------	---

- Screw for mounting safety strap\*
- 1 Manual on USB stick

F. For safety strap

- 1 Charger (100-240 V AC) with cable
- 1 Carrying case, WxHxD: 270x240x120 mm [10.6x9.4x4.7"]
  - Weight (complete kit): 2200 g [4.85 lbs]
  - \* Safety strap is accessory. (Safety regulations differ from country to country.)

Digital Precision Level		
Displayed resolution	0.1, 0.01, 0.001 mm/m [mils/inch]	
	0.001, 0.0001, 0.00001 inch/foot	
	10, 1, 0.1 arcsec	
	0.01, 0.001, 0.0001 degree	
Precision level range	±20 mm/m [±20 mils/inch] (pitch)	
Precision level accuracy	±0.02 mm/m ±1% [±0.02 mils/inch ±1%]	
Precision level sensitivity	0.001 mm/m [0.001 mils/inch]	
Inclinometer range	±180° (pitch and roll)	
Inclinometer accuracy	±0.2° (within range ±5°), ±1° (within range ±180°)	
Type of display	TFT 240x240 pixels, RGB colour	
Communication	BT wireless technology, 20 m [65'] range	
Environmental protection	IP Class 66/67	
Warning sensors	Temperature change and vibration	
Operating temperature	-10–50 °C [14–122 °F]	
Storage temperature	-20–50 °C [-4–122 °F]	
Operating time	Up to 20 h continuously	
Internal battery	Li-lon	
Material	Corrosion resistant hardened steel, PC/ABS	
Dimensions	WxHxD: 149.0x37.3x47.1 mm [5.87x1.47x1.85"]	
Weight (precision level unit)	548 g [19.3 oz]	



Precision ground prismatic base. Two holes for personal adaptations and brackets.



Legs for measurement on cylindrical surfaces with diameters larger than 55 mm. Accessory, Part No. 12-0901.

Easy-Laser® is manufactured by Easy-Laser AB, Alfagatan 6, SE-431 49 Mölndal, Sweden Tel +46 31 708 63 00, Fax +46 31 708 63 50, e-mail: info@easylaser.com, www.easylaser.com © 2023 Easy-Laser AB. We reserve the right to make changes without prior notification. Easy-Laser® is a registered trademark of Easy-Laser AB. Apple, the Apple logo, iPhone, and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc Other trademarks belong to their respective owners. Documentation ID: 05-0976 Rev3











Hassellunden 11A, 2765 Smørum Tel. 45 95 04 10 info@buhl-bonsoe.dk www.buhl-bonsoe.dk