

CASELLA

HAVex

HAVex Vibration Meter



Make all the measurements necessary for Hand Arm Vibration risk assessment. The HAVex Tri-Axial Hand Arm Vibration Meter has been specifically designed for Hand Arm Vibration Exposure Measurements.

www.casellasolutions.com

Applications


- Hand Arm Vibration Exposure Measurements
- Risk assessment
- Power tool condition and maintenance database
- ISO 5349 : 2001 Mechanical Vibration – Guidelines for Measurement
- ANSI S2.70 (2006) guide for the measurement and evaluation of human exposure to vibration transmitted to the hand

Key Features

- Simple operation
- Robust accelerometer & cable
- Colour display
- Stores over 900 measurements
- Large measurement range
- Rechargeable battery
- Easily view, export & report data
- Supplied as a kit with everything you need to begin measuring

It's a simple to use meter that measures the levels of vibration transmitted to the hand from power tools, vehicles, machine controls and other vibration sources.

Casella Vibdata Hand Arm Vibration Software

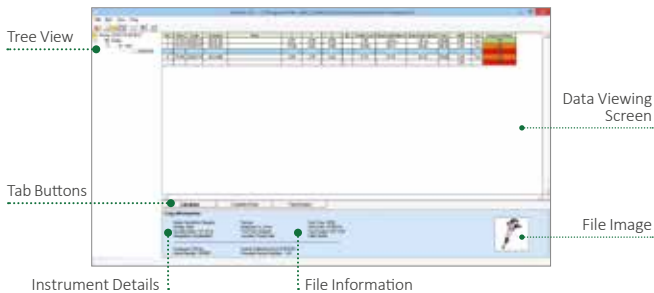

The HAVex meter is supplied with the Vibdata Lite software which allows you to download your measurements via USB for analysis and storage of data as required by the regulations. It is also possible to upgrade to Vibdata Pro which has the following added features:

- Exposure Calculator
- Merge/Combine Results
- Add Images
- Trend Analysis
- Add new records

Casella UK, Bedford, United Kingdom

Tel: +44 (0) 1234 844100
Email: info@casellasolutions.com

Casella China, IDEAL Industries China, Shanghai, China

Tel: +86-21-31263188
Email: info@casellasolutions.cn

Casella Australia, IDEAL Industries (Aust) Pty Ltd, Melbourne, Australia

Tel: +61 (0)395622684
Email: australia@casellasolutions.com

Casella USA, Buffalo, USA

Tel: +1 (716) 276-3040
Email: info-us@casellasolutions.com

Casella India, IDEAL Industries India Pvt.Ltd, Haryana, India

Tel: +91 124 4495100
Email: casella.sales@ideal-industries.in

Technical Specification

Performance:	Conforms to ISO 8041 : 2005 Human Response to Vibration – Measuring Instrumentation
Level Ranges:	Low: 0.05-200m/s ² , 0.005-20.4g High: 0.5-2000m/s ² , 0.05-204g
Parameters:	Acceleration: Arms, Aeq, Amax, Peak, Vector Sum, Exposure Points
Frequency Weighting:	W _H - Hand Arm Filter
Memory:	Flash memory storing up to 992 recordings
Display:	Full colour, graphic OLED 160 x 128
Batteries:	NiMH re-chargeable (typically 10 hours continuous use)
Connections:	AC Output: 4 pole 3.5mm jack Download: USB Micro B (cable incl.) Recharge: DC socket (charger & cable supplied)
Environmental:	Temperature: -10°C to +50°C Humidity: up to 90% RH non-condensing



Ordering Information

M104006	Casella HAVex kit: Comprising of: HAVex meter, HARM Tri-axial Accelerometer & Cable, Mounting Plate, Carry Case, Vibdata Lite software
----------------	---

Accessories

M104009*	HARM Tri-axial Accelerometer & Cable
M104014**	Vibdata Pro Vibration Analysis Software
M104016*	Mounting Block
M104018*	Charger Unit
M104020*	USB Cable

* Supplied with the Casella HAVex as part of the kit

** Upgrade from the supplied Vibdata LITE software supplied with the instrument

Distributed By: